


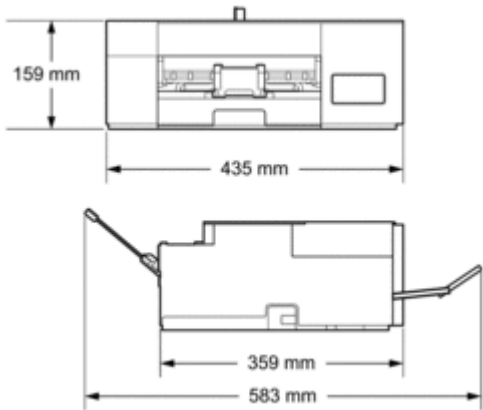

### 3 in 1 Printer, refill tank, wireless printer

<b>Printer Type</b>		Inkjet
<b>Print Head</b>	<b>Mono</b>	Piezo with 210 nozzles x 1
	<b>Colour</b>	Piezo with 70 nozzles x 3
<b>Memory Capacity</b>		64 MB
<b>Power Source</b>		AC 110 to 120 V 50/60 Hz (Taiwan) AC 220 to 240 V 50/60 Hz (Other countries)
<b>Power Consumption <sup>*1</sup></b>		<b>Copying <sup>*2</sup></b> : Approx. 11 W <b>Ready <sup>*3</sup></b> : Approx. 2.5 W <b>Sleep <sup>*3</sup></b> : Approx. 0.7 W <b>Power Off <sup>*3</sup> <sup>*4</sup></b> : Approx. 0.2 W
<b>Dimensions</b>		
<b>Weights</b>		6.3 kg
<b>Noise Level</b>	<b>Sound Pressure</b>	<b>Operating</b> 53.5 dB (A) (Approx.) <sup>*5</sup>
<b>Temperature</b>	<b>Operating</b>	10 to 35°C
	<b>Best Print Quality</b>	20 to 33°C
<b>Humidity</b>	<b>Operating</b>	20 to 80% (without condensation)
	<b>Best Print Quality</b>	20 to 80% (without condensation)

\*1

Measured when the machine is connected to the USB interface. Power consumption varies slightly depending on the usage environment or part wear.

\*2

When single-sided printing, resolution: standard / document: ISO/IEC 24712 printed pattern.

\*3

Measured according to IEC 62301 Edition 2.0.

\*4

Even when the machine is turned off, it will automatically turn itself on periodically for print head maintenance, and then turn itself off.

\*5

Noise depends on printing conditions.

### Document Size Specifications

### 3 in 1 Printer, refill tank, wireless printer

<b>Document Size</b>	<b>Scanner Glass Width</b>	Max. 215.9 mm
	<b>Scanner Glass Length</b>	Max. 297 mm

### Print Media Specifications

<b>Paper Input</b>	<b>Paper Tray</b>	<b>Paper Type <sup>*1</sup></b>	Plain Paper, Inkjet Paper (coated paper), Glossy Paper, Recycled Paper
		<b>Paper Size <sup>*2</sup></b>	A4, Letter, Legal, Mexico Legal, India Legal, Folio, Executive, B5 (JIS), A5, B6 (JIS), A6, Envelopes (C5, Com-10, DL, Monarch), Photo (4" x 6" / (10 x 15 cm), Photo 2L (5" x 7" / (13 x 18 cm), Index card (5" x 8" / (13 x 20 cm)
		<b>Maximum Paper Capacity</b>	Up to 150 sheets of 80 gsm plain paper
	<b>Manual Feed Slot</b>	<b>Paper Type <sup>*1</sup></b>	Plain Paper, Inkjet Paper (coated paper), Glossy Paper, Recycled Paper
		<b>Paper Size <sup>*2</sup></b>	A4, Letter, Legal, Mexico Legal, India Legal, Folio, Executive, B5 (JIS), A5, B6 (JIS), A6, Envelopes (C5, Com-10, DL, Monarch), Photo (4" x 6" / (10 x 15 cm), Photo L (3.5" x 5" / (9 x 13 cm), Photo 2L (5" x 7" / (13 x 18 cm), Index card (5" x 8" / (13 x 20 cm)
		<b>Maximum Paper Capacity</b>	Up to 1 sheet
<b>Paper Output <sup>*1</sup></b>		Up to 50 sheets of 80 gsm Plain Paper (face up print delivery to the output paper tray)	

<sup>\*1</sup> For glossy paper, remove any printed pages from the output paper tray immediately to avoid smudging.

<sup>\*2</sup> Legal, Mexico Legal, India Legal, Folio, B5 (JIS) and B6 (JIS) size paper are supported only in some countries.

### Copy Specifications

<b>Colour/Monochrome</b>	Yes/Yes
<b>Copy Width</b>	204 mm <sup>*1</sup>
<b>Multiple Copies</b>	Stacks up to 99 pages
<b>Enlarge/Reduce</b>	25% to 400% (in increments of 1%) <sup>*2</sup>
<b>Resolution</b>	Prints up to 1200 × 1800 dpi

<sup>\*1</sup> When copying on A4 size paper.

<sup>\*2</sup> When copying using Brother iPrint&Scan.

### Scanner Specifications

<b>Colour/Monochrome</b>	Yes/Yes
<b>TWAIN Compliant</b>	Yes (Windows 7 SP1 / Windows 8.1 / Windows 10 / Windows 11)

### 3 in 1 Printer, refill tank, wireless printer

<b>WIA Compliant</b>	Yes (Windows 7 SP1 / Windows 8.1 / Windows 10 / Windows 11)
<b>Colour Depth</b>	30 bit colour processing (Input) 24 bit colour processing (Output)
<b>Greyscale</b>	10 bit colour processing (Input) 8 bit colour processing (Output)
<b>Resolution</b>	Up to 19200 × 19200 dpi (interpolated) <a href="#">*1</a> <a href="#">*2</a> Up to 1200 × 2400 dpi (optical)
<b>Scanning Width and Length</b> (Single-sided document)	Width: Up to 213.9 mm Length: Up to 295 mm

\*1

Maximum 1200 × 1200 dpi scanning with the WIA driver in Windows 7 SP1, Windows 8.1, Windows 10 and Windows 11 (resolution up to 19200 × 19200 dpi can be selected using the scanner utility).

\*2

The scanning range may decrease as the scanning resolution increases.

### Printer Specifications

<b>Resolution</b>	Up to 1200 × 6000 dpi (Windows only)
<b>Printing Width</b> <a href="#">*1</a>	204 mm Borderless <a href="#">*2</a> : 210 mm
<b>Borderless</b>	A4, Letter, A6, Photo (10 x 15 cm), Photo L (9 x 13 cm), Photo 2L (13 x 18 cm), Index card (13 x 20 cm)
<b>Print Speed</b>	See your model's page on your local Brother website.

\*1

When printing on A4 size paper.

\*2

When the Borderless feature is set to On.

### Interface Specifications

<b>USB</b> <a href="#">*1</a> <a href="#">*2</a>	Use a USB 2.0 interface cable that is no longer than 2 m.
<b>Wireless LAN</b>	IEEE 802.11b/g/n (Infrastructure) IEEE 802.11g/n (Wireless Direct)

\*1

Your machine has a USB 2.0 Hi-Speed interface. The machine can also be connected to a computer that has a USB 1.1 interface.

\*2

Third party USB ports are not supported.

### Network Specifications

You can connect your machine to a network for Network Printing and Network Scanning.

<b>Network Security (Wireless)</b>	SSL/TLS (IPPS, HTTPS)
<b>Wireless Network Security</b>	SSID (32 characters), WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES)
<b>Wireless Setup Support Utility</b> (DCP-T420W/DCP-T425W/DCP-T426W)	<b>WPS</b> Yes